

# H-692261

## 通气过滤阀

- 材料
- 主体-铝6061-T6,原色光亮的表面处理.
  - 空气过滤器-青铜颗粒烧结
  - 过滤类别G4~F5.
  - 平均分离率(大约70~90%，颗粒尺寸约为 $\square 40\mu\text{m}$ ).

- 可按需提供的增值附件
- 按需求替换材质.
  - 按需求改变过滤精度.

- 螺纹密封环
- 铝AL1060.(基于DIN 7603 A 标准).

- 最高连续工作温度
- $-40^{\circ}\text{C}\sim 180^{\circ}\text{C}$ .

- 技术特性
- H-692261通气过滤阀用于微压箱体内部与外界空气进行交互的作用，通气过滤阀可防止外部的灰尘杂质进入箱体内部,也可防止内部油液散发到外界.

## Breather Filters Valve


- Material
- Body – Al6061-T6 , mill finished.
  - Air filter – Bronze particle sintering.
  - Filter category G4~F5.
  - Mean separation rate(Am approx 70~90%,based in a particle size  $\geq 40\mu\text{m}$ ).

- Accessories on request
- Other materials .
  - Other filter category.

- Thread gasket
- Aluminum Al1060.(Sealing DIN 7603A)

- Maximum continuous working temperature
- $-40^{\circ}\text{C}\sim 110^{\circ}\text{C}$ .

- Technical Characteristics
- Breather filters valve H-692261 are used when the air exchange is to be allowed between the inside of the container and the ambient air. The filter prevents air-borne particles ,dust from being carried from the outside to the inside of the container. It also ensures that oil particles do not escape to the outside.

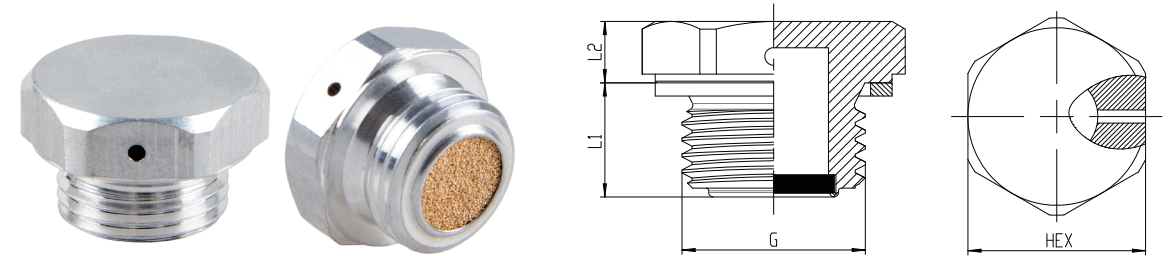

| Part No.   | G        | L2  | L1 | HEX | Filtration degree    |
|------------|----------|-----|----|-----|----------------------|
| 692261-6L  | BSP 1/4" | 7   | 8  | 17  | $\geq 40\mu\text{m}$ |
| 692261-9L  | BSP 3/8" | 7.5 | 9  | 22  | $\geq 40\mu\text{m}$ |
| 692261-12L | BSP 1/2" | 8   | 11 | 27  | $\geq 40\mu\text{m}$ |
| 692261-16L | BSP 3/4" | 8   | 11 | 32  | $\geq 40\mu\text{m}$ |
| 692261-22L | BSP 1"   | 9   | 14 | 40  | $\geq 40\mu\text{m}$ |

| Part No.   | G       | L2  | L1 | HEX | Filtration degree    |
|------------|---------|-----|----|-----|----------------------|
| 692261-10F | M10x1.0 | 6.5 | 8  | 14  | $\geq 40\mu\text{m}$ |
| 692261-12F | M14x1.5 | 7   | 9  | 17  | $\geq 40\mu\text{m}$ |
| 692261-16F | M16x1.5 | 7.5 | 10 | 22  | $\geq 40\mu\text{m}$ |
| 692261-18F | M18x1.5 | 7.5 | 10 | 22  | $\geq 40\mu\text{m}$ |
| 692261-20F | M20x1.5 | 8   | 11 | 24  | $\geq 40\mu\text{m}$ |
| 692261-22F | M22x1.5 | 8   | 11 | 27  | $\geq 40\mu\text{m}$ |
| 692261-24F | M24x1.5 | 8   | 11 | 30  | $\geq 40\mu\text{m}$ |
| 692261-27F | M27x1.5 | 8   | 11 | 32  | $\geq 40\mu\text{m}$ |
| 692261-33F | M33x1.5 | 9   | 14 | 40  | $\geq 40\mu\text{m}$ |